



BC856AW ~ BC859CW

PNP GENERAL PURPOSE TRANSISTORS

VOLTAGE 30/45/65 Volts **POWER** 250 mWatts

SOT-323

Unit : inch(mm)


FEATURES

- General purpose amplifier applications
- PNP epitaxial silicon, planar design
- Collector current $I_C = 100\text{mA}$
- Complimentary (NPN) Devices : BC846AW/BC847AW/BC848AW/BC849BW Series
- Lead free in comply with EU RoHS 2011/65/EU directives
- Green molding compound as per IEC61249 Std. . (Halogen Free)

MECHANICAL DATA

- Case: SOT-323, Plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0002 ounce, 0.005 gram

Device Marking:			
BC856AW=56A	BC857AW=57A	BC858AW=58A	
BC856BW=56B	BC857BW=57B	BC858BW=58B	BC859BW=59B
	BC857CW=57C	BC858CW=58C	BC859CW=59C

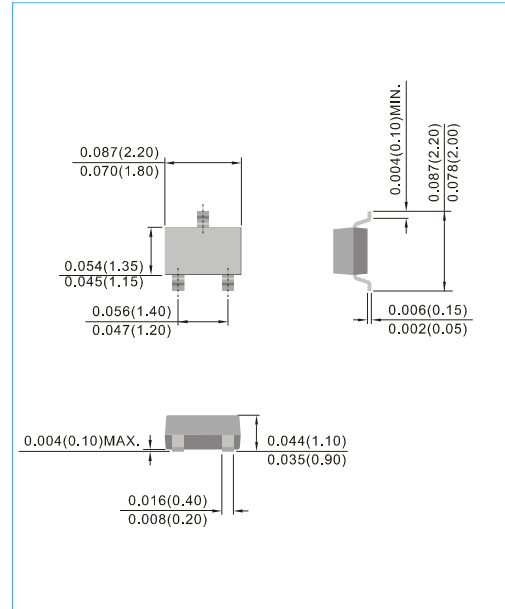

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Units
Collector - Emitter Voltage	V_{CEO}	-65 -45 -30 -30	V
Collector - Base Voltage	V_{CBO}	-80 -50 -30 -30	V
Emitter - Base Voltage	V_{EBO}	6 6 -5 -5	V
Collector Current - Continuous	I_C	-100	mA
Max. Power Dissipation (Note 1)	P_{TOT}	250	mW
Storage Temperature Range	T_{STG}	-55 to 150	°C
Junction Temperature Range	T_J	-55 to 150	°C

Note : 1. Transistor mounted on FR-5 board 1 x 0.75 x 0.062 in.




Fig.35



BC856AW ~ BC859CW

THERMAL CHARACTERISTICS

PARAMETER	Symbol	Value	Units
Thermal Resistance (Note 2) (Note 3)	$R_{\theta JA}$ $R_{\theta JC}$	500 200	$^{\circ}\text{C/W}$

Note : 2.Mounted on an FR4 PCB, single-sided copper, mini pad.

3.Mounted on an FR4 PCB, single-sided copper, with 100cm² copper pad area

ELECTRICAL CHARACTERISTICS ($T_J=25^{\circ}\text{C}$, unless otherwise noted)

PARAMETER	Symbol	MIN.	TYP.	MAX.	Units
Collector - Emitter Breakdown Voltage ($I_C=-10\text{mA}$, $I_B=0$)	$V_{(BR)CEO}$	-65 -45 -30	-	-	V
Collector - Base Breakdown Voltage ($I_C=-10\mu\text{A}$, $I_E=0$)	$V_{(BR)CBO}$	-80 -50 -30	-	-	V
Emitter-Base Breakdown Voltage ($I_E=-1\mu\text{A}$, $I_C=0$)	$V_{(BR)EBO}$	-5.0	-	-	V
Emitter-Base Cutoff Current ($V_{EB}=-5\text{V}$)	I_{EBO}	-	-	-100	nA
Collector-Base Cutoff Current ($V_{CB}=-30\text{V}$, $I_E=0$)	I_{CBO}	-	-	-15 -4.0	nA μA
DC Current Gain ($I_C=-10\mu\text{A}$, $V_{CE}=-5\text{V}$)	h_{FE}	-	90 150 270	-	-
DC Current Gain ($I_C=-2.0\text{mA}$, $V_{CE}=-5\text{V}$)	h_{FE}	110 200 420	180 290 520	220 450 800	-
Collector - Emitter Saturation Voltage ($I_C=-10\text{mA}$, $I_B=-0.5\text{mA}$) ($I_C=-100\text{mA}$, $I_B=-5.0\text{mA}$)	$V_{CE(SAT)}$	- -	- -	-0.3 -0.65	V
Base - Emitter Saturation Voltage ($I_C=-10\text{mA}$, $I_B=-0.5\text{mA}$) ($I_C=-100\text{mA}$, $I_B=-5.0\text{mA}$)	$V_{BE(SAT)}$	- -	-0.7 -0.9	- -	V
Base - Emitter Voltage ($I_C=-2\text{mA}$, $V_{CE}=-5.0\text{V}$) ($I_C=-10\text{mA}$, $V_{CE}=-5.0\text{V}$)	$V_{BE(ON)}$	-0.60 -	- -	-0.75 -0.82	V
Collector - Base Capacitance ($V_{CB}=-10\text{V}$, $I_E=0$, $f=1\text{MHz}$)	C_{CB}	-	-	4.5	pF
Current-Gain-Bandwidth Product ($I_C=-10\text{mA}$, $V_{CE}=-5.0\text{V}$, $f=100\text{MHz}$)	F.	-	200	-	MHz



BC856AW ~ BC859CW

ELECTRICAL CHARACTERISTICS CURVES

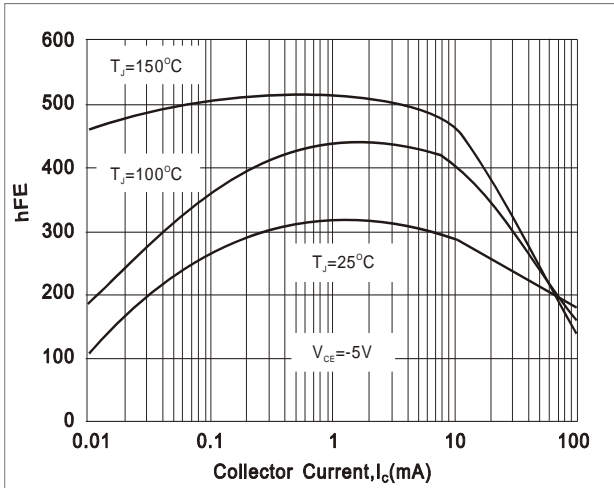


Fig.1- TYPICAL h_{FE} vs. Collector Current

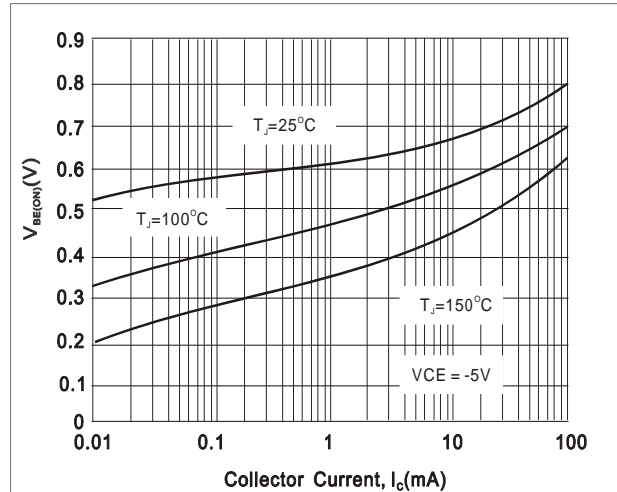


Fig.2- TYPICAL $V_{BE(ON)}$ vs. Collector Current

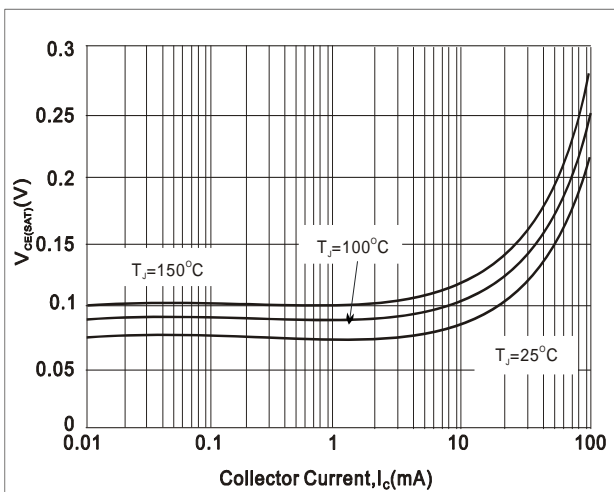


Fig.3- TYPICAL $V_{CE(SAT)}$ vs. Collector Current


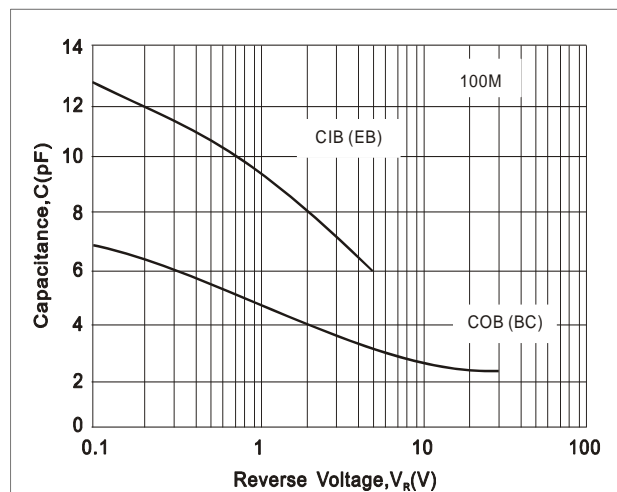


Fig.4- TYPICAL CAPACITANCES vs. REVERSE VOLTAGE



BC856AW ~ BC859CW

MOUNTING PAD LAYOUT

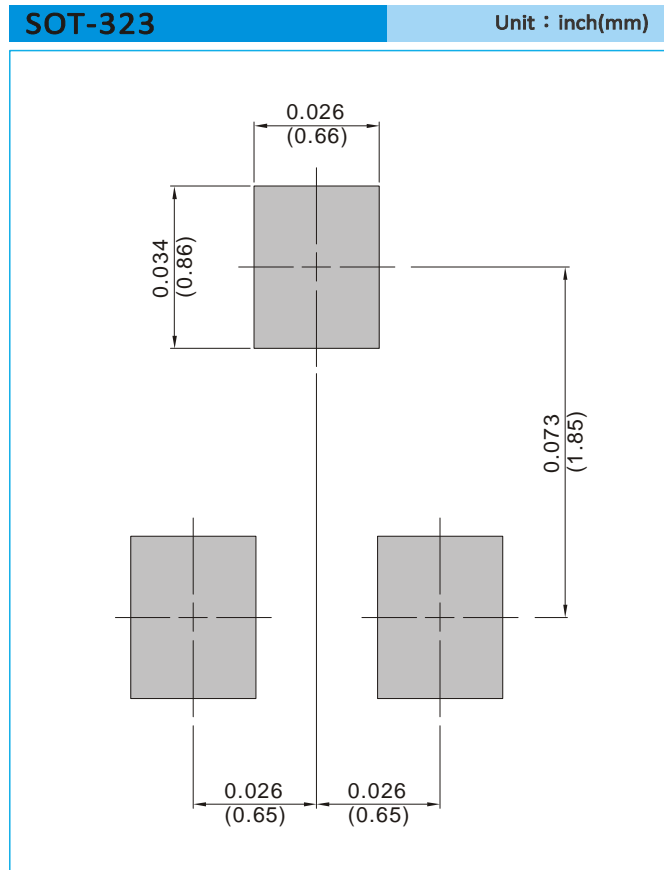

ORDER INFORMATION

- Packing information
T/R - 12K per 13" plastic Reel
T/R - 3K per 7" plastic Reel



BC856AW ~ BC859CW

Part No_packing code_Version

BC856AW_R1_00001

BC856AW_R2_00001

For example :

RB500V-40_R2_00001



Packing Code XX				Version Code XXXXX		
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	B	13"	2			
Tube Packing (T/P)	T	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			



BC856AW ~ BC859CW

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panjit:](#)

[BC857BW_R1_10001](#) [BC857BW_R2_00001](#) [BC857BW_R2_10001](#) [BC857BW_R1_00001](#)