

## UL-Series - UL489 Miniature Molded Case Circuit Breaker - 2 pole C-Trip - AC



E329510

Two Pole



Standard Pack: 6

Weight:

0.3-32A:

1.74kg (3.83lb.)



40-63A:

1.98kg (4.37lb.)

| Rated Current | Type/ Cat. No. | Rated Voltage |
|---------------|----------------|---------------|
| 0.3A          | 2C03UL         | 480Y/277V AC  |
| 0.5A          | 2C05UL         | 480Y/277V AC  |
| 1.0A          | 2C1UL          | 480Y/277V AC  |
| 1.6A          | 2C1.6UL        | 480Y/277V AC  |
| 2.0A          | 2C2UL          | 480Y/277V AC  |
| 3.0A          | 2C3UL          | 480Y/277V AC  |
| 4.0A          | 2C4UL          | 480Y/277V AC  |
| 5.0A          | 2C5UL          | 480Y/277V AC  |
| 6.0A          | 2C6UL          | 480Y/277V AC  |
| 8.0A          | 2C8UL          | 480Y/277V AC  |
| 10A           | 2C10UL         | 480Y/277V AC  |
| 12A           | 2C12UL         | 480Y/277V AC  |
| 13A           | 2C13UL         | 480Y/277V AC  |
| 15A           | 2C15UL         | 480Y/277V AC  |
| 16A           | 2C16UL         | 480Y/277V AC  |
| 20A           | 2C20UL         | 480Y/277V AC  |
| 25A           | 2C25UL         | 480Y/277V AC  |
| 30A           | 2C30UL         | 480Y/277V AC  |
| 32A           | 2C32UL         | 480Y/277V AC  |
| 40A           | 2C40UL         | 240V AC       |
| 50A           | 2C50UL         | 240V AC       |
| 60A           | 2C60UL         | 240V AC       |
| 63A           | 2C63UL         | 240V AC       |

|                                 |                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------|
| Current/ Voltage Rating         | 0.3 - 63A/ 240V AC, 0.3-32A/ 480Y/277V AC*                                         |
| Calibration Temperature         | 40°C (104°F)                                                                       |
| Ambient Temperature             | -25°C to +55°C (-13°F to 131°F)                                                    |
| Storage Temperature             | -40°C to +70°C (-40°F to 158°F)                                                    |
| Terminal Torque (min/max)       | 2 Nm (17.7 lb.in.) / 2.5Nm (22.2 lb.in)                                            |
| Electrical Life                 | 6000 switching cycles ON/ OFF                                                      |
| Mechanical Life                 | 10000 switching cycles ON/ OFF                                                     |
| Vibration Resistance            | > 15g according to DIN EN 60069-2-59 during a load<br>with $I_1 = 1.05 \times I_N$ |
| Resistance to mechanical shocks | 25g @ 11ms                                                                         |

\*One device dual voltage ratings.

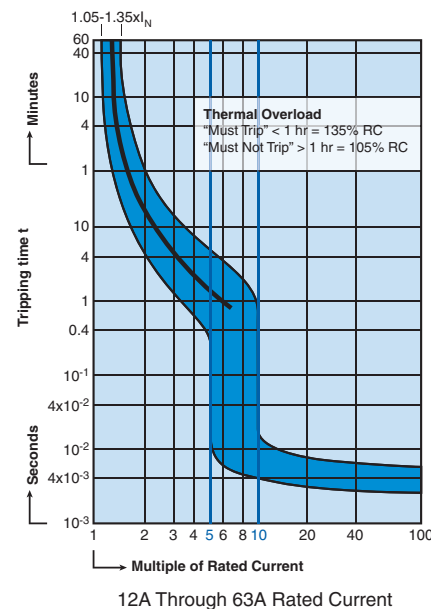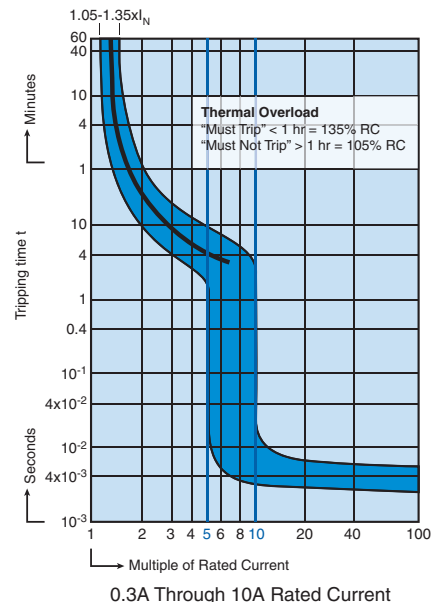

### "C" Magnetic Trip Parameters


Rated current 0.3A to 63A.

1. Hold for a minimum of 100ms at surge of 5 times rated current.
2. Trip in under 100ms at 10 times rated current.

### Short Circuit Interrupting Capacity

AC

| No. Poles | Type | 03-32A                     | 33-63A          |
|-----------|------|----------------------------|-----------------|
| 2-3       | AC   | 10kA @ 120, 240, 480Y/277V | 10kA @ 120 240V |

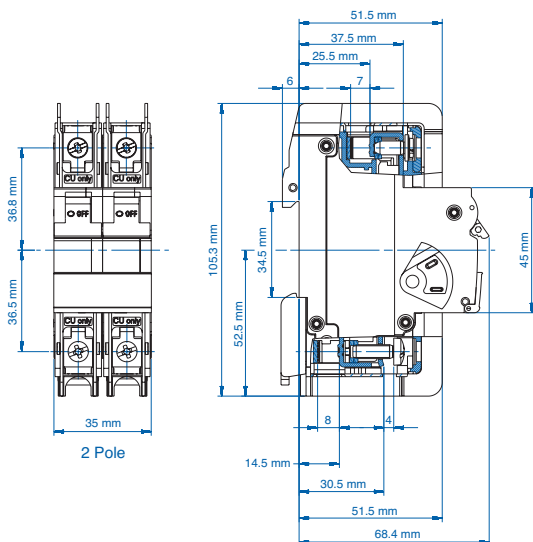

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Altech:

[2C40UL](#) [2C8UL](#) [2C03UL](#) [2C4UL](#) [2C15UL](#) [2C30UL](#) [2C60UL](#) [2C3UL](#) [2C63UL](#) [2C32UL](#) [2C20UL](#) [2C1.6UL](#)  
[2C10UL](#) [2C6UL](#) [2C50UL](#) [2C5UL](#) [2C1UL](#) [2C2UL](#) [2C25UL](#) [2C16UL](#) [2C05UL](#) [2C12UL](#) [3C60UL](#) [2C13UL](#) [N63UL](#)  
[N32UL](#) [2D13UL](#)