
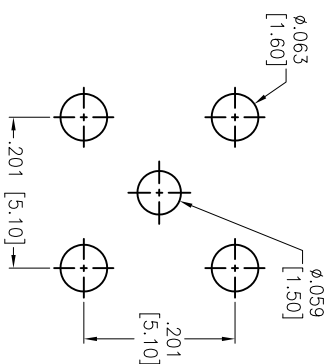



APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/15/17	
A		UPDATE DRAWING	10/23/18	AY/RC
B		UPDATE SPEC.	10/15/20	AY/TTL

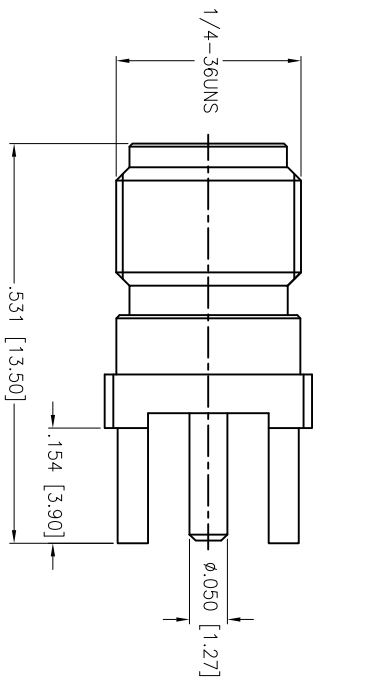

RECOMMENDED PCB LAYOUT

CONTACT PIN	BRASS	GOLD
INSULATOR	PTFE	WHITE
BODY	BRASS	GOLD
DESCRIPTION	MATERIAL	FINISH

SPECIFICATIONS:

Electrical:

Nominal Impedance: 50 ohms
 Frequency range: DC-6 GHz
 Working voltage: 500 VOLTS max.
 Proof voltage: 1,000 VOLTS

VSWR: 1.2 max

Insert Loss: 0.3dB

Temperature Rating:

Operating temperature: -65°C to +165°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES
 .X ± .10 ØX ± .10
 .XX ± .020 ØXX ± .015
 .XXX ± .015 ØXXX ± .010

APPROVALS

DRAWN	AY	12/15/17
CHECKED	RC	12/15/17
APPROVED		

ADAM TECH

909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE

RF CONNECTOR, SMA STR PCB JACK

SIZE	PART NO.	REV.
X	RF2-04A-T-00-50-G	B
REF: S00277	SCALE: NTS	SHEET 1 OF 1