Apr.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

HRS DRAWING FOR REFERENCE

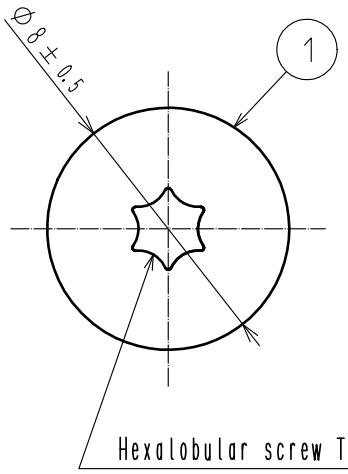

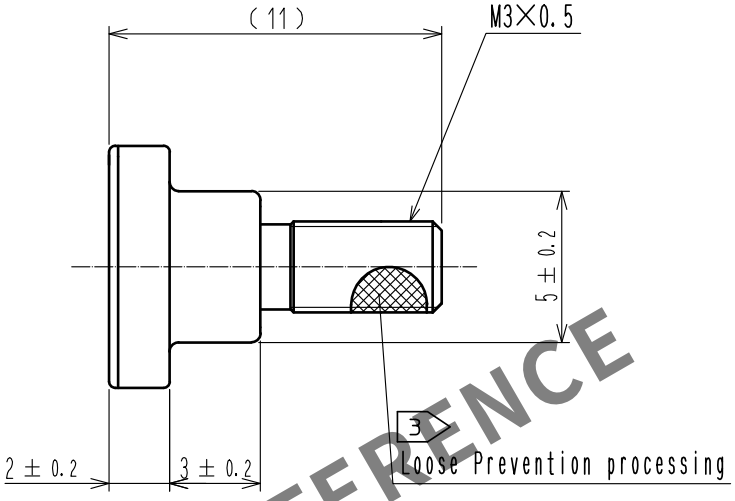

Assembled connector(Reference) (2:1)

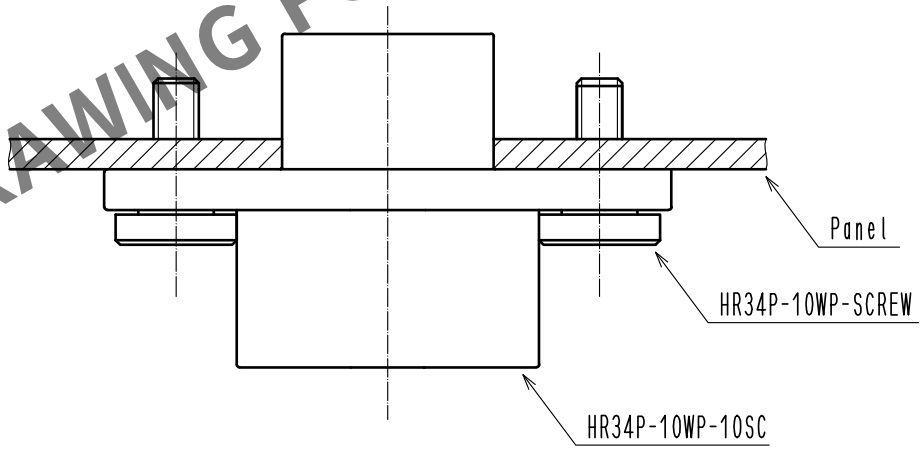

Notes 1 This product is assembled to a 'HR34P-10WP-10SC' without any defect.
2 This product is packed in a bag.(Quantity in a bag : 1000 PCS.)
3 Loose prevention processing :「Nylok (Blue)」
4 Material : JIS No.「SUSXM-7」
5 The reference tightening torque for the flooting screw : 0.65 ~ 0.7 N・m.
※Depends on cabinet specifications.

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
1	STAINLESS STEEL 4	M3 × 0.5			

UNITS mm	SCALE 4 : 1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
		0				

HIROSE ELECTRIC CO., LTD.

APPROVED	YH. YAMADA	20200609	DRAWING NO.	EDC-392043-00-00
CHECKED	HY. KOBAYASHI	20200609	PART NO.	HR34P-10WP-SCREW
DESIGNED	KN. IKEHARA	20200608	CODE NO.	CL134-0080-0-00 0
DRAWN	KN. IKEHARA	20200608		