

BATTERY CONNECTORS

Right Angle 3.0mm Pitch 9155-300



A further addition to the battery connector range offered by KYOCERA AVX is a 90 degree version. On a 3mm pitch, offered in 2 to 6 contact positions and rated as with all of the battery range at 3 amps. The connector's design is small and compact to minimize its profile yet stable while having a contact point 4.61mm above the PCB.

The stability comes from the addition of extra SMT anchor brackets that are in between the SMT contact pads and both at the front of the connector and within the row of the contact SMT pads.

As with the other 9155 series of battery connectors offered by KYOCERA AVX the 90 degree version is rated at 3 amps and 5000 mating cycles, RoHS compliant and using high temperature plastic enables the connectors to be processed at up to 260°C.

APPLICATIONS

- Mobile phones
- Digital music players
- Hand held terminals
- Data terminals or any other small portable device

FEATURES AND BENEFITS

- Simple designed spring contact
- End to end stackable for larger pin counts
- Additional contact anchor brackets to added stability on the PCB
- Robust to shock and vibration
- Selectively plated contact area

ELECTRICAL

- Current Rating: 3 Amp / Contact
- Voltage Rating: 125 VAC

ENVIRONMENTAL

- Operating Temperature: -40°C to +125°C

MECHANICAL

- Insulator Material: Glass-Filled Nylon 46; UL94 HB
- Contact Material: Beryllium Copper
- Plating: Gold over Nickel
- Durability: 5000 Cycles

HOW TO ORDER

00

Prefix

9155

Series

00X

No. of Ways

2 = 002
3 = 003
4 = 004
5 = 005
6 = 006

301

Right Angle
Battery Connector

Code	Description
301	Right Angle 3.00mm Battery Connector

00X

Plating Option



Code	Description
006	0.4µm Selective Gold, Standard
008	0.8µm Selective Gold, Special Order




BATTERY CONNECTORS

Right Angle 3.0mm Pitch 9155-300


2 WAY RIGHT ANGLE BATTERY CONNECTOR

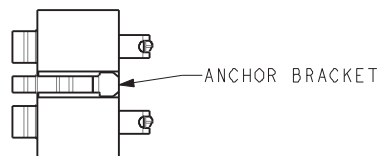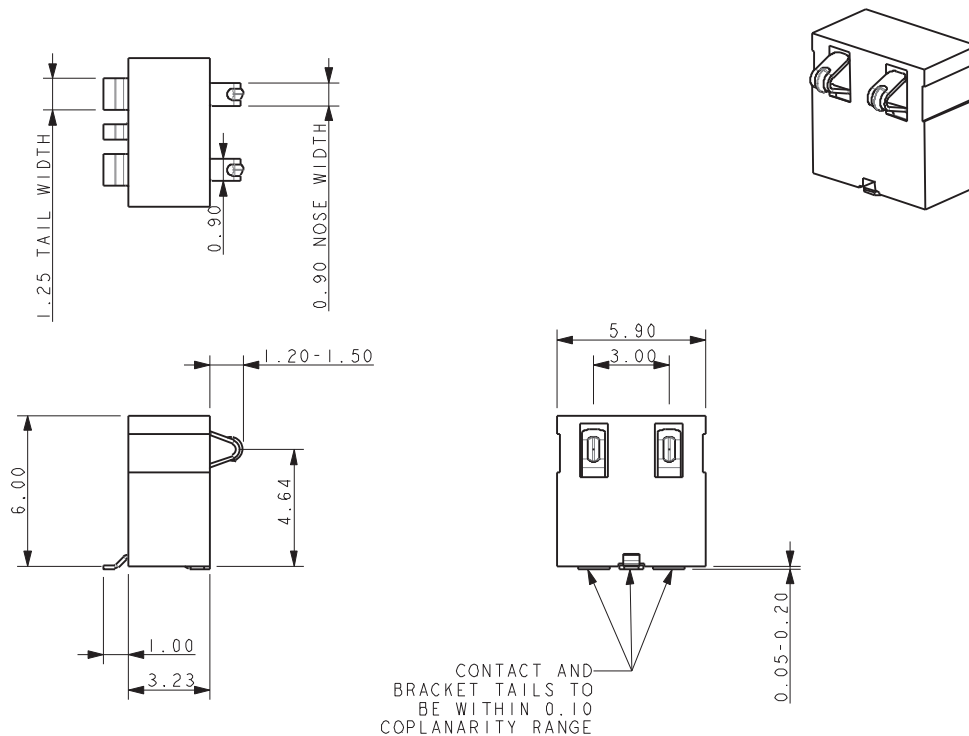

PCB LAYOUT

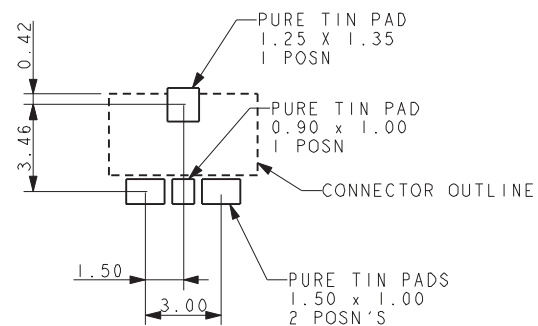

PACKING DETAILS

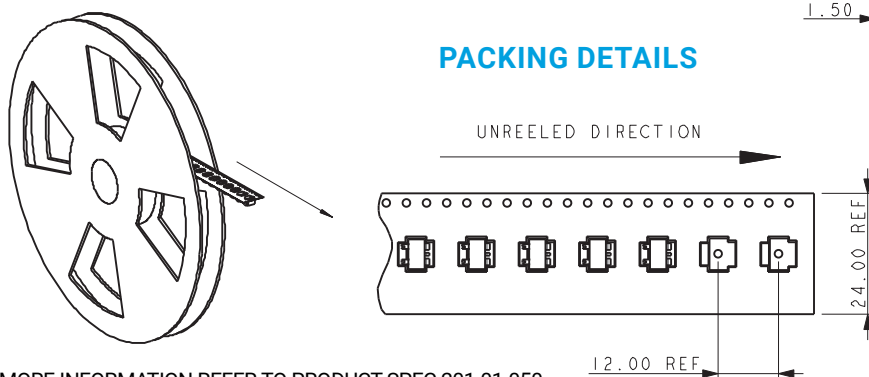

REEL QTY	800
LEADER	480MM
TRAILER	480MM



NOTES:

1. FOR MORE INFORMATION REFER TO PRODUCT SPEC 201-01-050.
2. GENERAL TOLERANCE ± 0.20 UNLESS OTHERWISE STATED.
3. FOR MATING PAD DETAILS REFER TO PAGE 29.
4. INSULATOR MATERIAL: 30% GLASS FILLED NYLON 46, UL94 V-O. COLOR BLACK.
5. CONTACT MATERIAL: BERYLLIUM COPPER.
6. CONTACT PLATING: SELECTIVE GOLD OVER NICKEL. PURE TIN ON TAILS.
7. BRACKET MATERIAL: PHOSPHOR BRONZE.
8. BRACKET PLATING: PURE TIN OVER NICKEL.


BATTERY CONNECTORS

Right Angle 3.0mm Pitch 9155-300


3 WAY RIGHT ANGLE BATTERY CONNECTOR

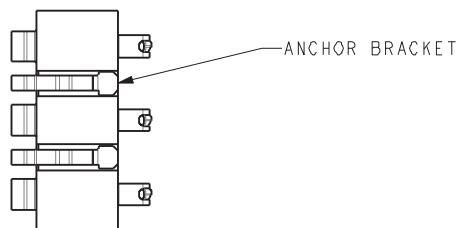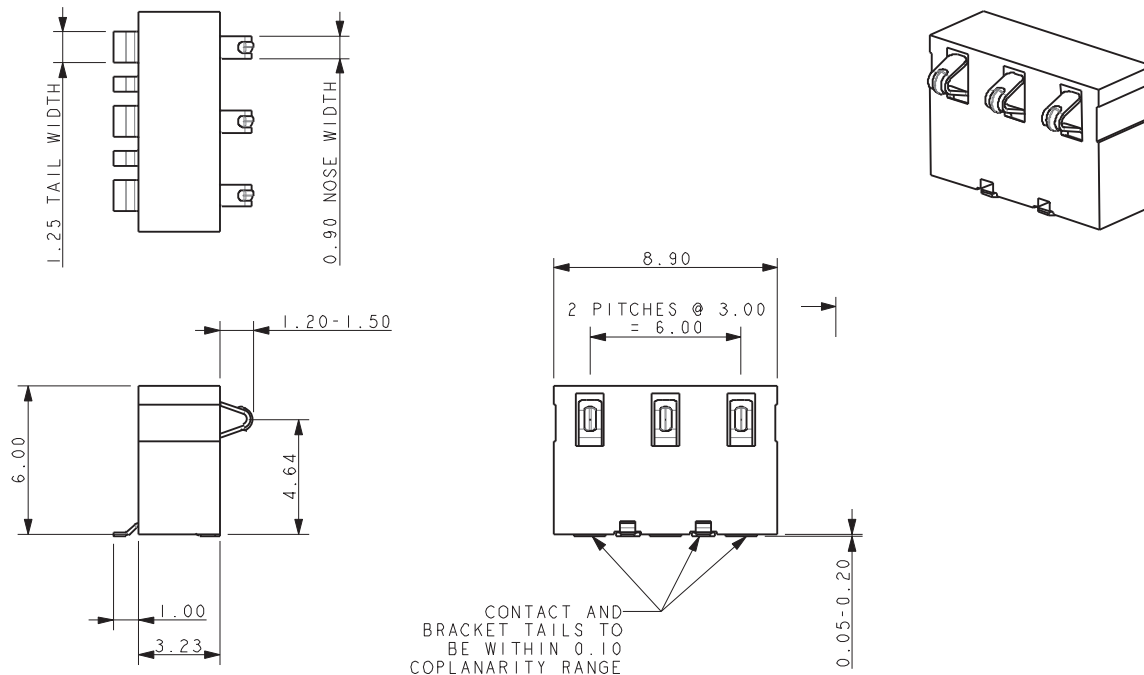

PCB LAYOUT

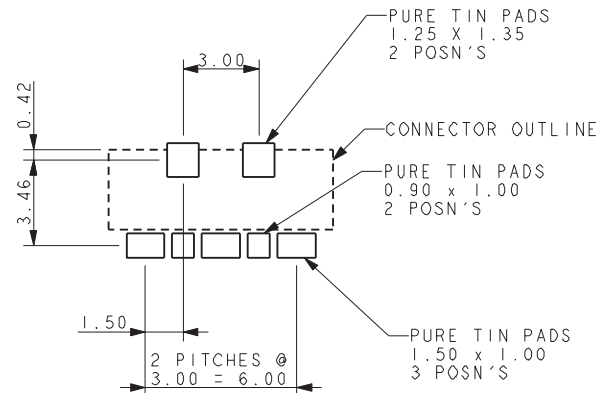

PACKING DETAILS

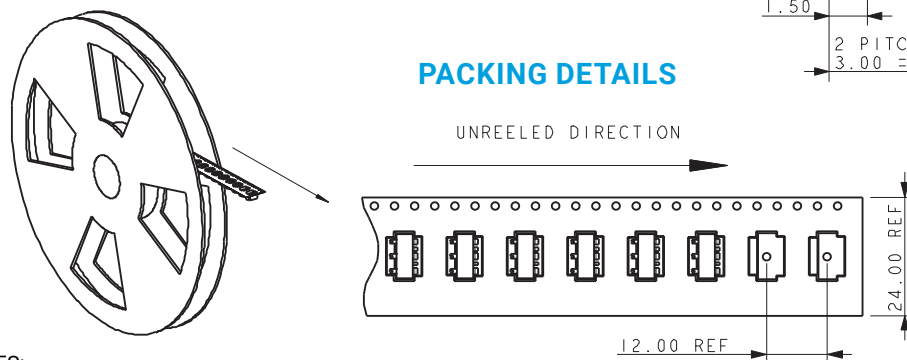

REEL QTY	800
LEADER	480MM
TRAILER	480MM




NOTES:

1. FOR MORE INFORMATION REFER TO PRODUCT SPEC 201-01-050.
2. GENERAL TOLERANCE ± 0.20 UNLESS OTHERWISE STATED.
3. FOR MATING PAD DETAILS REFER TO PAGE 29.
4. INSULATOR MATERIAL: 30% GLASS FILLED NYLON 46, UL94 V-O. COLOR BLACK.
5. CONTACT MATERIAL: BERYLLIUM COPPER.
6. CONTACT PLATING: SELECTIVE GOLD OVER NICKEL. PURE TIN ON TAILS.
7. BRACKET MATERIAL: PHOSPHOR BRONZE.
8. BRACKET PLATING: PURE TIN OVER NICKEL.



BATTERY CONNECTORS

Right Angle 3.0mm Pitch 9155-300



4 WAY RIGHT ANGLE BATTERY CONNECTOR

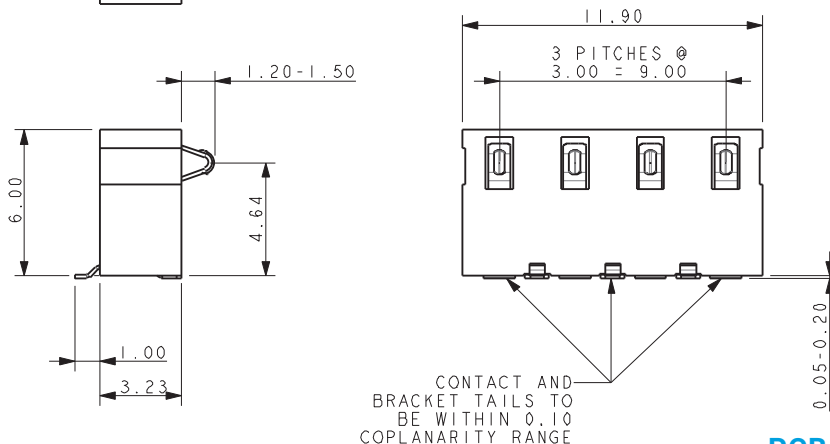

PCB LAYOUT

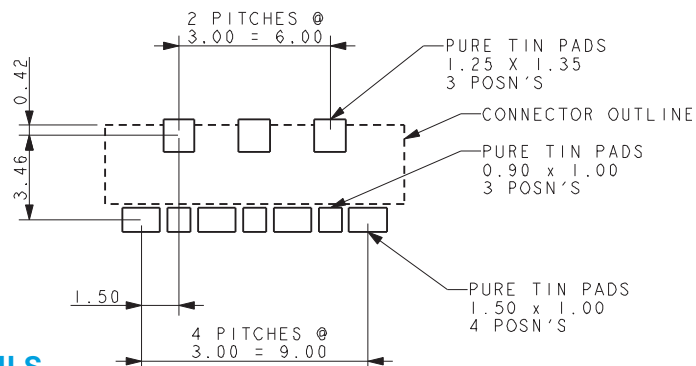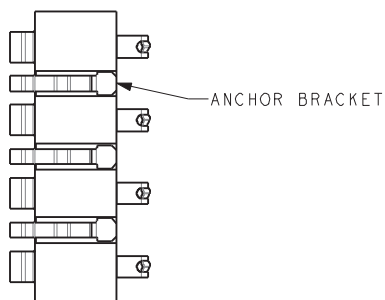

PACKING DETAILS

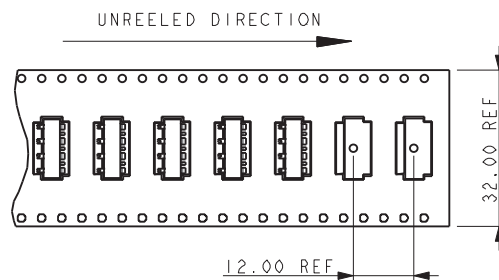

REEL QTY	800
LEADER	480MM
TRAILER	480MM





NOTES:

1. FOR MORE INFORMATION REFER TO PRODUCT SPEC 201-01-050.
2. GENERAL TOLERANCE ± 0.20 UNLESS OTHERWISE STATED.
3. FOR MATING PAD DETAILS REFER TO PAGE 29.
4. INSULATOR MATERIAL: 30% GLASS FILLED NYLON 46, UL94 V-O. COLOR BLACK.
5. CONTACT MATERIAL: BERYLLIUM COPPER.
6. CONTACT PLATING: SELECTIVE GOLD OVER NICKEL. PURE TIN ON TAILS.
7. BRACKET MATERIAL: PHOSPHOR BRONZE.
8. BRACKET PLATING: PURE TIN OVER NICKEL.


BATTERY CONNECTORS

Right Angle 3.0mm Pitch 9155-300



5 WAY RIGHT ANGLE BATTERY CONNECTOR

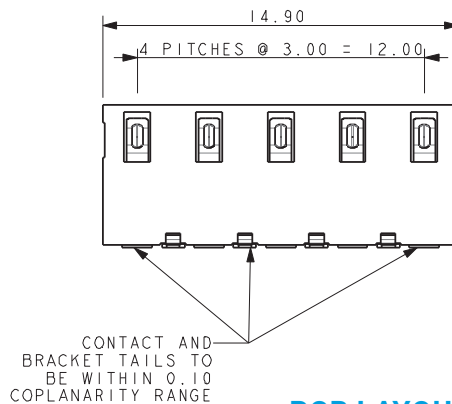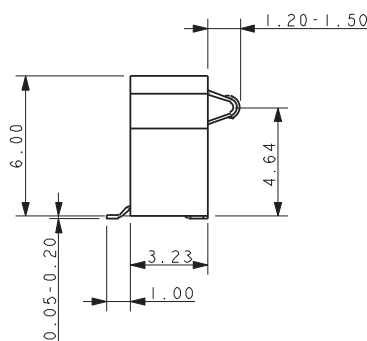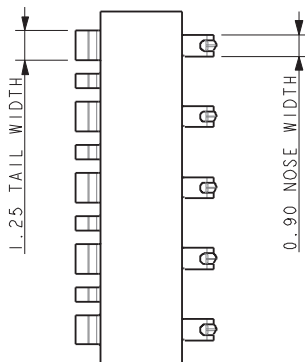

PCB LAYOUT

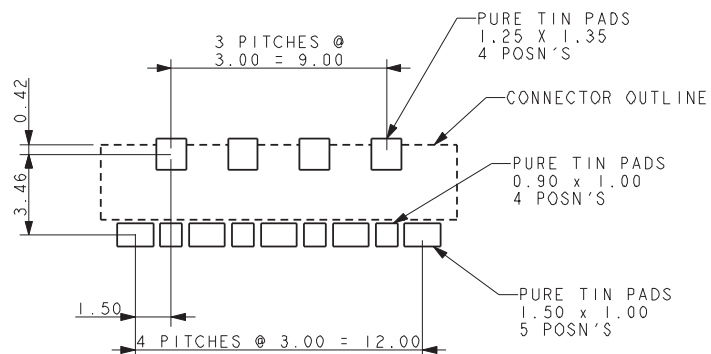

PACKING DETAILS

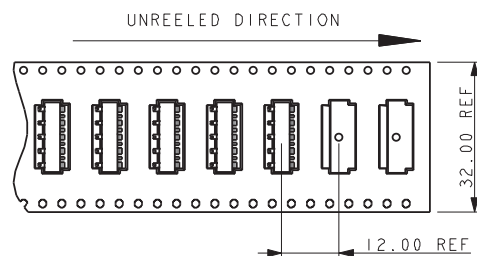

REEL QTY	800
LEADER	480MM
TRAILER	480MM

NOTES:

1. FOR MORE INFORMATION REFER TO PRODUCT SPEC 201-01-050.
2. GENERAL TOLERANCE ± 0.20 UNLESS OTHERWISE STATED.
3. FOR MATING PAD DETAILS REFER TO PAGE 29.
4. INSULATOR MATERIAL: 30% GLASS FILLED NYLON 46, UL94 V-O. COLOR BLACK.
5. CONTACT MATERIAL: BERYLLIUM COPPER.
6. CONTACT PLATING: SELECTIVE GOLD OVER NICKEL. PURE TIN ON TAILS.
7. BRACKET MATERIAL: PHOSPHOR BRONZE.
8. BRACKET PLATING: PURE TIN OVER NICKEL.

Dimensions and Features:

- Top View:** 1.25 TAIL WIDTH, 0.90 NOSE WIDTH.
- Side View:** 6.00, 1.20-1.50, 4.64, 3.23, 1.00, 0.05-0.20.
- Front View:** 17.90, 5 PITCHES @ 3.00 = 15.00.
- PCB LAYOUT:**
 - ANCHOR BRACKET
 - CONTACT AND BRACKET TAILS TO BE WITHIN 0.10 COPLANARITY RANGE
 - 4 PITCHES @ 3.00 = 12.00
 - PURE TIN PADS 1.25 X 1.35 5 POSN'S
 - CONNECTOR OUTLINE
 - PURE TIN PADS 0.90 x 1.00 5 POSN'S
 - PURE TIN PADS 1.50 x 1.00 6 POSN'S
 - 5 PITCHES @ 3.00 = 15.00
- PACKING DETAILS:**
 - UNREELED DIRECTION
 - 32.00 REF
 - 12.00 REF
- Table:**

REEL QTY	800
LEADER	480MM
TRAILER	480MM

1. FOR MORE INFORMATION REFER TO PRODUCT SPEC 201-01-050.
2. GENERAL TOLERANCE ± 0.20 UNLESS OTHERWISE STATED.
3. FOR MATING PAD DETAILS REFER TO PAGE 29.
4. INSULATOR MATERIAL: 30% GLASS FILLED NYLON 46, UL94 V-O. COLOR BLACK.
5. CONTACT MATERIAL: BERYLLIUM COPPER.
6. CONTACT PLATING: SELECTIVE GOLD OVER NICKEL. PURE TIN ON TAILS.
7. BRACKET MATERIAL: PHOSPHOR BRONZE.
8. BRACKET PLATING: PURE TIN OVER NICKEL.

30

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

KYOCERA AVX:

[009155004003006](#) [009155005003006](#) [009155003003006](#) [009155005002006](#) [009155005001006](#)
[009155003002006](#) [009155003003001](#) [009155004001006](#) [009155003001006](#) [009155002301006](#) [009155004301006](#)
[009155005301006](#) [009155003301006](#) [009155004002006](#)