

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATIO



---

JUN , 1990.

© COPYRIGHT 1990 By Tyco Electronics Japan G.K.

ALL RIGHTS RESERVED

LOC J	DIST -	REVISIONS 变更							
		P	LTR	DESCRIPTION			DATE	DWN	APVD
			D	REVISED	PER	ECR-15-011723	08AUG2015	Y.O	E.T

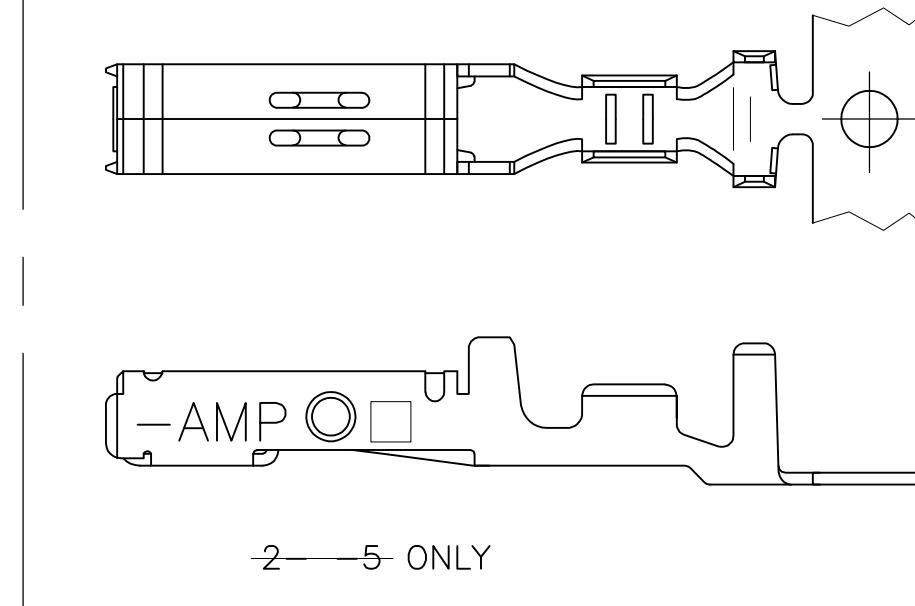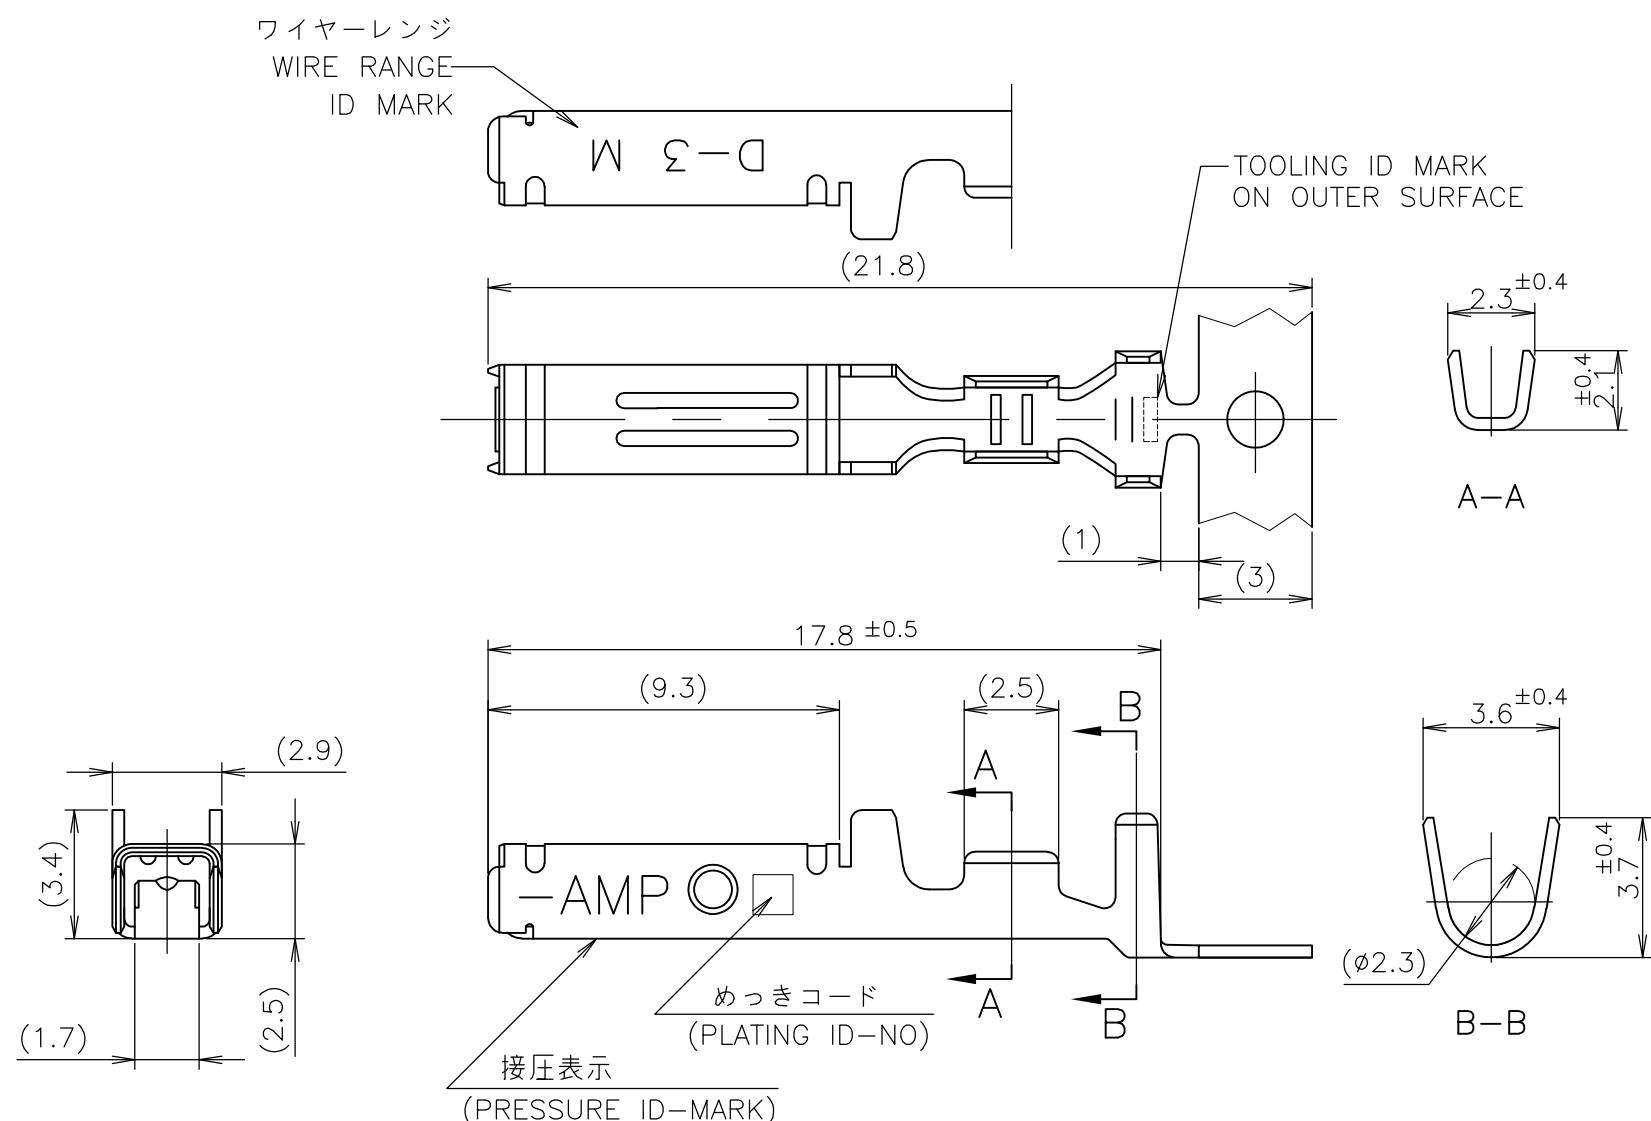

- △ 標準接圧型コンタクト：一般向け及び多極用
- △ 高接圧型コンタクト：高電流用及び強振動用
- △ 金めっきは接続部のみとする

4 製品規格：108-5349

5 取付け適用規格：114-5148

↑ CONTACT TYPE: LOW PRESSURE TYPE (FOR GENERAL)


 CONTACT TYPE; HIGH PRESSURE TYPE  
(FOR HIGH CURRENT OR ANTI-VIBRATION)

FOR HIGH CURRENT OR ANTI-GOUD-PI CONTACT AREA ONLY

#### 4 PRODUCT SPEC: 108-5349

## 5 APPLICATION SPEC: 114-5148

GENERAL TOLERANCE  
一般公差

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 27JUN1990 T-YONEBAYASHI CHK 14FEB1991 H.OBATA	WIRE RANGE 抱合電線断面積 AWG 24-20 (0.2-0.5mm <sup>2</sup> ) mm <sup>2</sup>	INSULATION DIA 被覆外径		
DIMENSIONS: 单位: 毫mm		 <b>TE</b> TE Connectivity				
		<b>TOLERANCES UNLESS OTHERWISE SPECIFIED:</b> 一般公差				
0 PLC		± -	APVD 14FEB1991 S.MANABE			
1 PLC		± -	PRODUCT SPEC 製品規格			
2 PLC		± -	APPLICATION SPEC 取付適用規格			
3 PLC		± -				
4 PLC		± -				
ANGLES		± -				
MATERIAL 材料 (COPPER ALLOY) 銅合金		FINISH 仕上 (SEE TABLE) 表参照	WEIGHT —	CUSTOMER DRAWING		
			SCALE 尺度	5:1	SHEET 1 OF 1	REV D

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-175195-2 \(Mouser Reel\)](#) [1-175195-2 \(Cut Strip\)](#)