


# Sulfur tolerant chip resistors

SFR series Datasheet

### Features

- 1) Special construction prevents sulfur gas penetration, significantly increasing reliability.
- 2) ROHM resistors have obtained ISO9001 / ISO / TS16949 certification.
- 3) Corresponds to AEC-Q200.



### Products list

Part No.	Siz	Size	Rated power	Limiting element	Temperature coefficient	Resistance tolerance	Resista	nce range	Operating temperature	Automotive grade										
	(mm)	(inch)	(70°C) (W)	voltage (V)	(ppm/°C)		(Ω)		range (°C)	available										
					±100	F(±1%)	10 ≦R≦2.2M	(E24/96 series)												
SFR01	1005	0402	0.063	50	+500 / -250	J(±5%)	1.0≦R<10	(E24 series)	-55 ~ +155	5 Yes										
SERUI	1005	0402			±200	J(±5%)	10 ≦R≦10M	(E24 series)	-55 ~ +155	165										
					Jumper type) Rn	nax = 50mΩ M	AX. / Imax = 1A													
					±100	F(±1%)	10 ≦R≦10M	(E24/96 series)												
SFR03	1608	0603	0000	0000	0000	0000	0000	0603	0000	0603	0603	0602	0.10	0.10 50	±400	J(±5%)	1≦R<10	(E24 series)	-55 ~ +155	Yes
JINUS	1000		,		±200	J(±5%)	10 ≦R≦10M	(E24 series)	-55 ~ +155	165										
				Jumper type) Rmax = $50$ mΩ MAX. / Imax = $1$ A																
		0805			±100	F(±1%)	10 ≦R≦2.2M	(E24/96 series)												
SFR10	2012		0.125	0.125	150	±400	J(±5%)	1 ≦R<10	(E24 series)	-55 ~ +155	Yes									
JINIO	2012				±200	J(±5%)	10 ≦R≦10M	(E24 series)	-55 ~ +155	165										
				Jumper type) Rmax = $50m\Omega$ MAX. / Imax = $2A$																
							±100	F(±1%)	10 ≦R≦2.2M	(E24/96 series)										
SFR18	3216	1206	0.25	200	±400	J(±5%)	1≦R<10	(E24 series)	-55 ~ +155	Yes										
JINIO	3210	1200			±200	J(±5%)	10 ≦R≦10M	(E24 series)	-50 1155											
					Jumper type) Rn	rax = 50mΩ M	AX. / Imax = 2A													
					0.5	0.5 200	±100	F(±1%)	10≦R≦1M	(E24/96 series)										
SFR25	3225	1210	0.5	200	±200	J(±5%)	1≦R≦1M	(E24 series)	-55 <b>~</b> +155	Yes										
					Jumper type) Rn	$max = 50m\Omega M$	AX. / Imax = 2A													

<sup>\*</sup> Design and specifications are subject to change without notice.

### Part Number Description















Part No.
SFR (Sulfur tolerant chip resistors)

Size (mm [inch])
01 (1005 [0402])
03 (1608 [0603])
10 (2012 [0805])
18 (3216 [1206])
25 (3225 [1210])

Packaging specifications code							
Part No.	Code	Packaging specifications	Quantity / Reel				
SFR01	MZP	Paper tape (2mmPitch)	10,000				
SFR03	EZP	Paper tape (4mm Pitch)	5,000				
SFR10	EZP	Paper tape (4mm Pitch)	5,000				
SFR18	EZP	Paper tape (4mm Pitch)	5,000				
SFR25	JZP	Embossed tape (4mm Pitch)	4,000				

tolerance	
F(±1%) J(±5%)	

No	Nominal resistance						
	Resistance code, 3 or 4 digits. 000 denotes jumper type.						
	Resistance Resis	stance ode					
		ligits ligits					
Ð	C) 1Ω = 1R0 (±5%)	,					
	$9.1\Omega = 9R1 (\pm 5\%)$ $10\Omega = 10R0 (\pm 1\%)$	)					
	100 (±5%)	,					
1	$1M\Omega = 1004 (\pm 1\%)$	)					

105 (±5%)


Carefully check the specification sheet supplied with the product before using or ordering it.

<sup>\*</sup> E24 : Standard products, E96 : Custom products.

## •Chip resistor dimensions and markings

## ■ SFR 01


## ■ SFR 03/10/18/25



(Unit:mm)

Part No.	(mm)	(inch)	L	W	t	а	b	Marking existence *Including jumper type
SFR01	1005	0402	1.0±0.05	0.5±0.05	0.35±0.05	0.33±0.08	0.25 <sup>+0.05</sup> <sub>-0.10</sub>	No
SFR03	1608	0603	1.6±0.1	0.8±0.1	0.45±0.1	0.4±0.2	0.3±0.2	Yes
SFR10	2012	0805	2.0±0.1	1.25 ±0.1	0.55±0.1	0.4±0.2	0.4±0.2	Yes
SFR18	3216	1206	3.2 <sup>+0.15</sup> <sub>-0.20</sub>	1.6±0.15	0.55±0.1	0.55±0.25	0.5±0.25	Yes
SFR25	3225	1210	3.2 <sup>+0.15</sup> <sub>-0.20</sub>	2.5±0.15	0.55±0.1	0.55±0.25	0.5±0.25	Yes

## ● Land pattern example



(Unit:mm)


Dimensions Part No.	А	В	С	D
SFR01	0.5	1.3	0.5	0.4
SFR03	1.0	2.0	0.8	0.5
SFR10	1.2	2.6	1.15	0.7
SFR18	2.2	4.0	1.5	0.9
SFR25	2.2	4.0	2.3	0.9

SFR series Datasheet

## Derating curve

When the ambient temperature exceeds 70°C, power dissipation must be adjusted according to the derating curves below.

### ■SFR 01/03/10/18/25



### Characteristics

Test items	Guaran	teed value	Test conditions	
lestitems	Resistor type Jumper type		lest conditions	
Resistance	Se	e P.1	20°C	
Variation of resistance with temperature	Se	e P.1	Measurement: +25/+125°C	
Overload	±2.0%	MAX 50mΩ	Rated voltage(current)×2.5, , 2s Maximum overload voltage※	
Solderability	Anew uniform co of 95% of the sur immersed and n damage.	•	Rosin-ethanol solution(25% weight) Soldering condition: 245±5°C Duration of immersion: 2.0±0.5s	
Resistance to soldering heat	sistance to ±1.0% MAX 50mΩ		Soldering condition: 260±5°C Duration of immersion: 10±1s	
Rapid change of temperature	±1.0%	MAX 50mΩ	Test temp:-55°C∼+125°C 5cycle	
Damp heat, steady state	±3.0%	MAX 100mΩ	40°c, 93%(Relative humidity) Test time: 1,000h	
Endurance at 70°C	±3.0%	MAX 100mΩ	Rated voltage(current),70°C 1.5h:ON – 0.5h:OFF Test time: 1,000h	
Endurance	±3.0%	MAX 100mΩ	155°C Test time: 1,000h	
Resistance to solvent	±1.0%	MAX 50mΩ	23±5°c, Immersion cleaning, 5±0.5min Solvent: 2-propanol	
Bend strength of the end face plating	±1.0% Without mechanical d	MAX 50mΩ amage such as breaks.	-	
Resistance in Sulfur vapor	±1.0%	MAX. 50mΩ	Put specimen and sulfur powder 10g in the desiccator which is placed under 110°C environment after sealed. Test time:1,000h	

Compliance Standard(s): IEC60115-8

JISC 5201-8


※Maximum overload voltage (Voltage of overload test)

SFR01	SFR03	SFR10	SFR18	SFR25
100V	100V	200V	400V	400V



## ●Tape dimensions


## ■Paper tape



					(Unit : mm)
Part No.	W	F	Е	A0	B0
SFR01	8.0±0.3	3.5±0.05	1.75±0.1	0.7±0.1	1.2±0.1
SFR03	8.0±0.3	3.5±0.05	1.75±0.1	1.1±0.1	1.9±0.1
SFR10	8.0±0.3	3.5±0.05	1.75±0.1	1.65 <sup>+0.2</sup> -0.1	2.4 <sup>+0.2</sup> -0.1
SFR18	8.0±0.3	3.5±0.05	1.75±0.1	1.95 <sup>+0.1</sup> -0.05	3.5 <sup>+0.15</sup> <sub>-0.05</sub>


Part No.	D0	P0	Pl	P2	T2
SFR01	Ф1.5 <sup>+0.1</sup>	4.0±0.1	2.0±0.05	2.0±0.05	MAX1.1
	Ф1.5 <sup>+0.1</sup>	4.0±0.1	4.0±0.1	2.0±0.05	MAX1.1
SFR10	Ф1.5 <sup>+0.1</sup>	4.0±0.1	4.0±0.1	2.0±0.05	MAX 1.1
SFR18	Ф1.5 <sup>+0.1</sup>	4.0±0.1	4.0±0.1	2.0±0.05	MAX1.1

## **■**Embossed tape



					(Unit:mm)
Part No.	W	F	Е	A0	B0
SFR25	8.0±0.3	3.5±0.05	1.75±0.1	3.0±0.1	3.5±0.1
	D0	P0	P1	P2	T2
	Ф1.5 <sup>+0.1</sup>	4.0±0.1	4.0±0.1	2.0±0.05	MAX1.1

### Reel dimensions

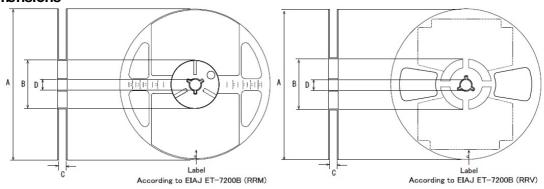

=				(Unit:mm)
Part No.	А	В	С	D
SFR01				
SFR03				
SFR10	Ф180 <sup>0</sup> -1.5	Ф60 <sup>+1.0</sup>	9 <sup>+1.0</sup>	Ф13±0.2
SFR18				
SFR25				

## **Notice**

### **Precaution on using ROHM Products**

1. If you intend to use our Products in devices requiring extremely high reliability (such as medical equipment (Note 1), aircraft/spacecraft, nuclear power controllers, etc.) and whose malfunction or failure may cause loss of human life, bodily injury or serious damage to property ("Specific Applications"), please consult with the ROHM sales representative in advance. Unless otherwise agreed in writing by ROHM in advance, ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of any ROHM's Products for Specific Applications.

(Note1) Medical Equipment Classification of the Specific Applications

1. (a. (a. (a. (a. (a. (a. (a. (a. (a. (a							
JAPAN	USA	EU	CHINA				
CLASSⅢ	CLASSⅢ	CLASS II b	CLASSⅢ				
CLASSIV	CLASSIII	CLASSⅢ	CLASSIII				

- 2. ROHM designs and manufactures its Products subject to strict quality control system. However, semiconductor products can fail or malfunction at a certain rate. Please be sure to implement, at your own responsibilities, adequate safety measures including but not limited to fail-safe design against the physical injury, damage to any property, which a failure or malfunction of our Products may cause. The following are examples of safety measures:
  - [a] Installation of protection circuits or other protective devices to improve system safety
  - [b] Installation of redundant circuits to reduce the impact of single or multiple circuit failure
- 3. Our Products are not designed under any special or extraordinary environments or conditions, as exemplified below. Accordingly, ROHM shall not be in any way responsible or liable for any damages, expenses or losses arising from the use of any ROHM's Products under any special or extraordinary environments or conditions. If you intend to use our Products under any special or extraordinary environments or conditions (as exemplified below), your independent verification and confirmation of product performance, reliability, etc, prior to use, must be necessary:
  - [a] Use of our Products in any types of liquid, including water, oils, chemicals, and organic solvents
  - [b] Use of our Products outdoors or in places where the Products are exposed to direct sunlight or dust
  - [c] Use of our Products in places where the Products are exposed to sea wind or corrosive gases, including Cl<sub>2</sub>, H<sub>2</sub>S, NH<sub>3</sub>, SO<sub>2</sub>, and NO<sub>2</sub>
  - [d] Use of our Products in places where the Products are exposed to static electricity or electromagnetic waves
  - [e] Use of our Products in proximity to heat-producing components, plastic cords, or other flammable items
  - [f] Sealing or coating our Products with resin or other coating materials
  - [g] Use of our Products without cleaning residue of flux (Exclude cases where no-clean type fluxes is used. However, recommend sufficiently about the residue.); or Washing our Products by using water or water-soluble cleaning agents for cleaning residue after soldering
  - [h] Use of the Products in places subject to dew condensation
- 4. The Products are not subject to radiation-proof design.
- 5. Please verify and confirm characteristics of the final or mounted products in using the Products.
- 6. In particular, if a transient load (a large amount of load applied in a short period of time, such as pulse, is applied, confirmation of performance characteristics after on-board mounting is strongly recommended. Avoid applying power exceeding normal rated power; exceeding the power rating under steady-state loading condition may negatively affect product performance and reliability.
- 7. De-rate Power Dissipation depending on ambient temperature. When used in sealed area, confirm that it is the use in the range that does not exceed the maximum junction temperature.
- 8. Confirm that operation temperature is within the specified range described in the product specification.
- ROHM shall not be in any way responsible or liable for failure induced under deviant condition from what is defined in this document.

### Precaution for Mounting / Circuit board design

- 1. When a highly active halogenous (chlorine, bromine, etc.) flux is used, the residue of flux may negatively affect product performance and reliability.
- 2. In principle, the reflow soldering method must be used on a surface-mount products, the flow soldering method must be used on a through hole mount products. If the flow soldering method is preferred on a surface-mount products, please consult with the ROHM representative in advance.

For details, please refer to ROHM Mounting specification

### **Precautions Regarding Application Examples and External Circuits**

- 1. If change is made to the constant of an external circuit, please allow a sufficient margin considering variations of the characteristics of the Products and external components, including transient characteristics, as well as static characteristics.
- 2. You agree that application notes, reference designs, and associated data and information contained in this document are presented only as guidance for Products use. Therefore, in case you use such information, you are solely responsible for it and you must exercise your own independent verification and judgment in the use of such information contained in this document. ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of such information.

#### **Precaution for Electrostatic**

This Product is electrostatic sensitive product, which may be damaged due to electrostatic discharge. Please take proper caution in your manufacturing process and storage so that voltage exceeding the Products maximum rating will not be applied to Products. Please take special care under dry condition (e.g. Grounding of human body / equipment / solder iron, isolation from charged objects, setting of lonizer, friction prevention and temperature / humidity control).

### **Precaution for Storage / Transportation**

- 1. Product performance and soldered connections may deteriorate if the Products are stored in the places where:
  - [a] the Products are exposed to sea winds or corrosive gases, including Cl<sub>2</sub>, H<sub>2</sub>S, NH<sub>3</sub>, SO<sub>2</sub>, and NO<sub>2</sub>
  - [b] the temperature or humidity exceeds those recommended by ROHM
  - [c] the Products are exposed to direct sunshine or condensation
  - [d] the Products are exposed to high Electrostatic
- Even under ROHM recommended storage condition, solderability of products out of recommended storage time period
  may be degraded. It is strongly recommended to confirm solderability before using Products of which storage time is
  exceeding the recommended storage time period.
- 3. Store / transport cartons in the correct direction, which is indicated on a carton with a symbol. Otherwise bent leads may occur due to excessive stress applied when dropping of a carton.
- 4. Use Products within the specified time after opening a humidity barrier bag. Baking is required before using Products of which storage time is exceeding the recommended storage time period.

### **Precaution for Product Label**

A two-dimensional barcode printed on ROHM Products label is for ROHM's internal use only.

### **Precaution for Disposition**

When disposing Products please dispose them properly using an authorized industry waste company.

### **Precaution for Foreign Exchange and Foreign Trade act**

Since concerned goods might be fallen under listed items of export control prescribed by Foreign exchange and Foreign trade act, please consult with ROHM in case of export.

### **Precaution Regarding Intellectual Property Rights**

- 1. All information and data including but not limited to application example contained in this document is for reference only. ROHM does not warrant that foregoing information or data will not infringe any intellectual property rights or any other rights of any third party regarding such information or data.
- 2. ROHM shall not have any obligations where the claims, actions or demands arising from the combination of the Products with other articles such as components, circuits, systems or external equipment (including software).
- 3. No license, expressly or implied, is granted hereby under any intellectual property rights or other rights of ROHM or any third parties with respect to the Products or the information contained in this document. Provided, however, that ROHM will not assert its intellectual property rights or other rights against you or your customers to the extent necessary to manufacture or sell products containing the Products, subject to the terms and conditions herein.

### Other Precaution

- 1. This document may not be reprinted or reproduced, in whole or in part, without prior written consent of ROHM.
- 2. The Products may not be disassembled, converted, modified, reproduced or otherwise changed without prior written consent of ROHM.
- In no event shall you use in any way whatsoever the Products and the related technical information contained in the Products or this document for any military purposes, including but not limited to, the development of mass-destruction weapons.
- 4. The proper names of companies or products described in this document are trademarks or registered trademarks of ROHM, its affiliated companies or third parties.

Notice-PAA-E Rev.004

### **General Precaution**

- 1. Before you use our Products, you are requested to carefully read this document and fully understand its contents. ROHM shall not be in any way responsible or liable for failure, malfunction or accident arising from the use of any ROHM's Products against warning, caution or note contained in this document.
- 2. All information contained in this document is current as of the issuing date and subject to change without any prior notice. Before purchasing or using ROHM's Products, please confirm the latest information with a ROHM sales representative.
- 3. The information contained in this document is provided on an "as is" basis and ROHM does not warrant that all information contained in this document is accurate and/or error-free. ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties resulting from inaccuracy or errors of or concerning such information.

Notice – WE Rev.001

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

### **ROHM Semiconductor:**

```
SFR01MZPJ221 SFR01MZPF1803 SFR01MZPF2001 SFR01MZPF1004 SFR01MZPF1201 SFR01MZPF8202
SFR01MZPF22R0 SFR01MZPF1000 SFR01MZPF1502 SFR01MZPF1500 SFR01MZPF1504 SFR01MZPJ330
SFR01MZPF3300 SFR01MZPJ1R0 SFR01MZPF2202 SFR03EZPF1000 SFR01MZPF6203 SFR01MZPF5901
SFR03EZPF4700 SFR01MZPF2000 SFR01MZPF1102 SFR01MZPF3000 SFR01MZPF1003 SFR01MZPJ106
SFR03EZPF1502 SFR01MZPF1303 SFR01MZPJ511 SFR01MZPF1503 SFR01MZPF3901 SFR01MZPJ512
SFR03EZPF1802 SFR01MZPF20R0 SFR03EZPF5101 SFR01MZPF15R0 SFR03EZPF15R0 SFR01MZPF2201
SFR01MZPJ473 SFR03EZPF2000 SFR01MZPJ430 SFR03EZPF5601 SFR01MZPF1103 SFR01MZPF4703
SFR03EZPF3001 SFR01MZPJ203 SFR01MZPJ472 SFR03EZPJ512 SFR03EZPJ1R0 SFR01MZPF5902
SFR01MZPF3002 SFR01MZPF3302 SFR01MZPJ392 SFR01MZPF10R0 SFR03EZPF6800 SFR03EZPF2201
SFR03EZPF10R0 SFR01MZPF47R0 SFR01MZPF33R0 SFR03EZPF7501 SFR01MZPF7501 SFR01MZPF4702
SFR03EZPF4701 SFR01MZPF2002 SFR03EZPF2002 SFR03EZPF3000 SFR03EZPF3301 SFR01MZPJ622
SFR03EZPF2701 SFR01MZPJ510 SFR03EZPF5100 SFR01MZPJ333 SFR01MZPJ335 SFR01MZPJ332
SFR01MZPF3001 SFR03EZPF1003 SFR03EZPF4702 SFR01MZPF1800 SFR03EZPJ1R1 SFR03EZPJ470
SFR03EZPJ6R8 SFR03EZPJ220 SFR03EZPJ222 SFR03EZPJ391 SFR03EZPJ103 SFR03EZPJ105
SFR03EZPJ330 SFR03EZPJ106 SFR03EZPJ153 SFR03EZPJ1R2 SFR03EZPJ6R2 SFR03EZPJ101
SFR03EZPJ102 SFR03EZPJ333 SFR03EZPJ1R3 SFR03EZPJ5R1 SFR03EZPJ272 SFR03EZPJ2R0
SFR03EZPJ331 SFR03EZPJ202 SFR03EZPJ472 SFR03EZPJ511
```